

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Problem Image Mailbox.**

FIG. 1

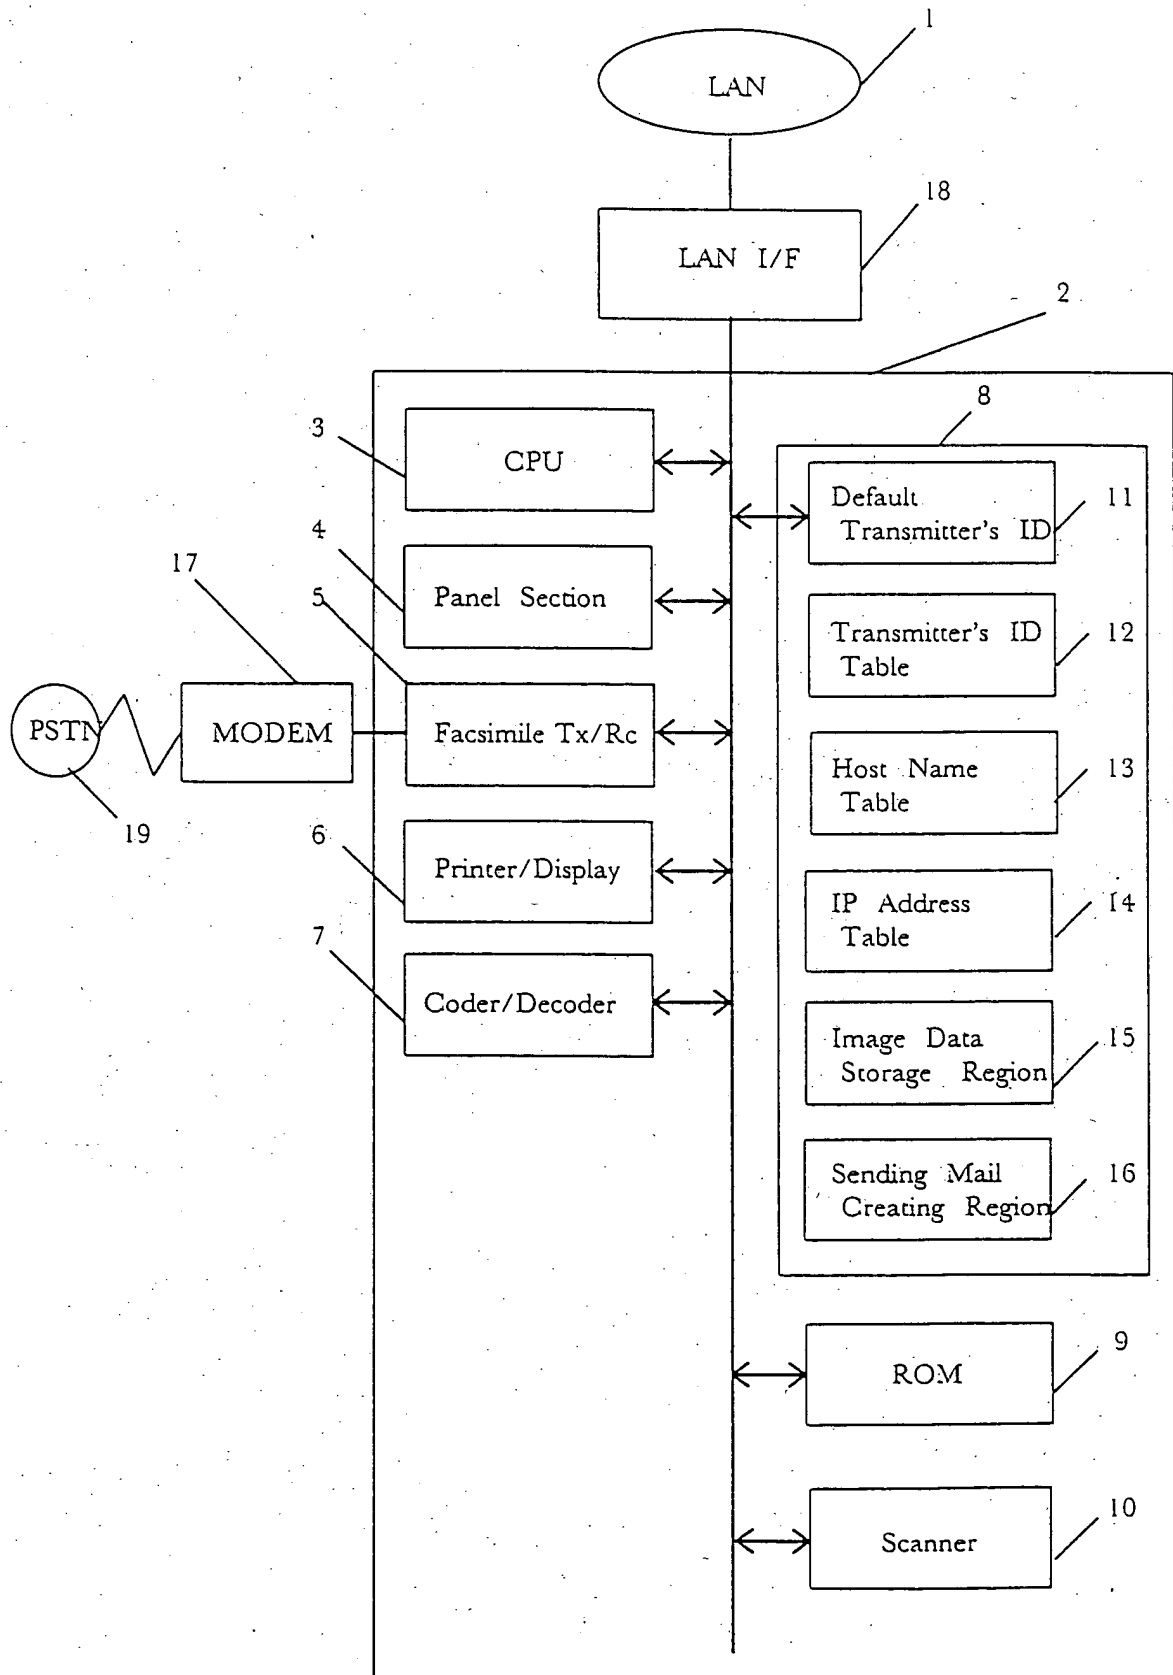


FIG. 2A

Transmitter Information Default

Machine's Name	Mail Address
Internet FAX	fax@aaa.bbb.jp

FIG. 2B

Transmitter's Identification Table

Transmitter's Name	Mail Address
suzuki	usr1@abc. defg. jp
yamada	usr2@abc. defg. jp
MGCS	<i>not set</i>
<i>not set</i>	usr4@abc. defg. jp

FIG. 3

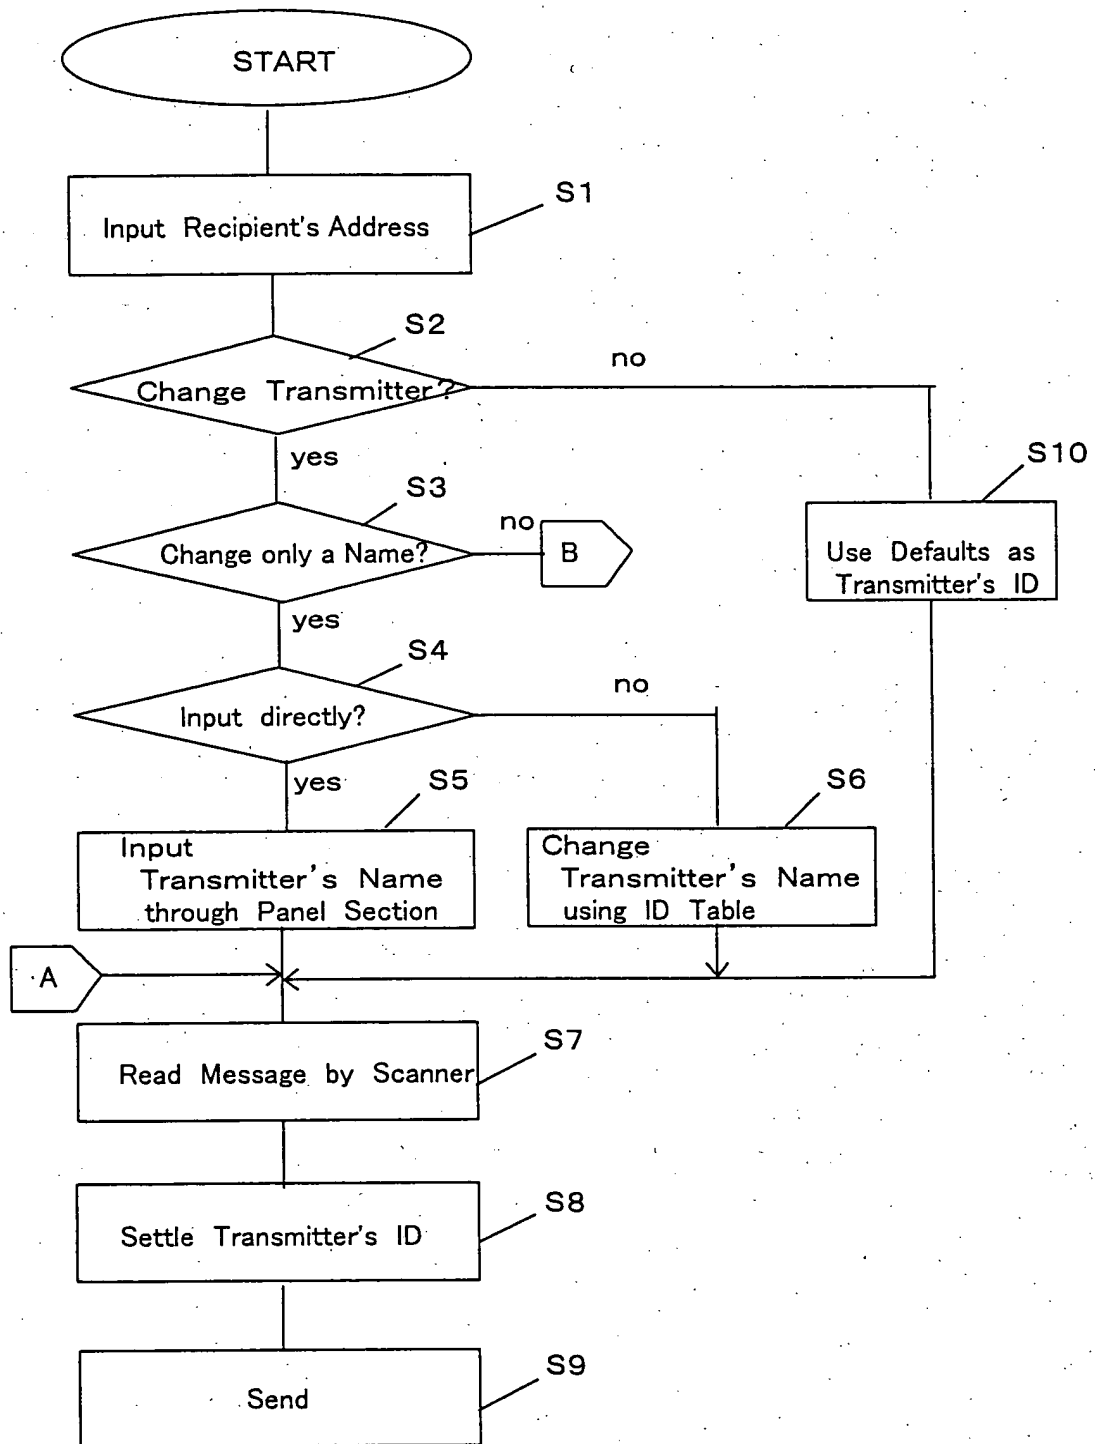


FIG. 4

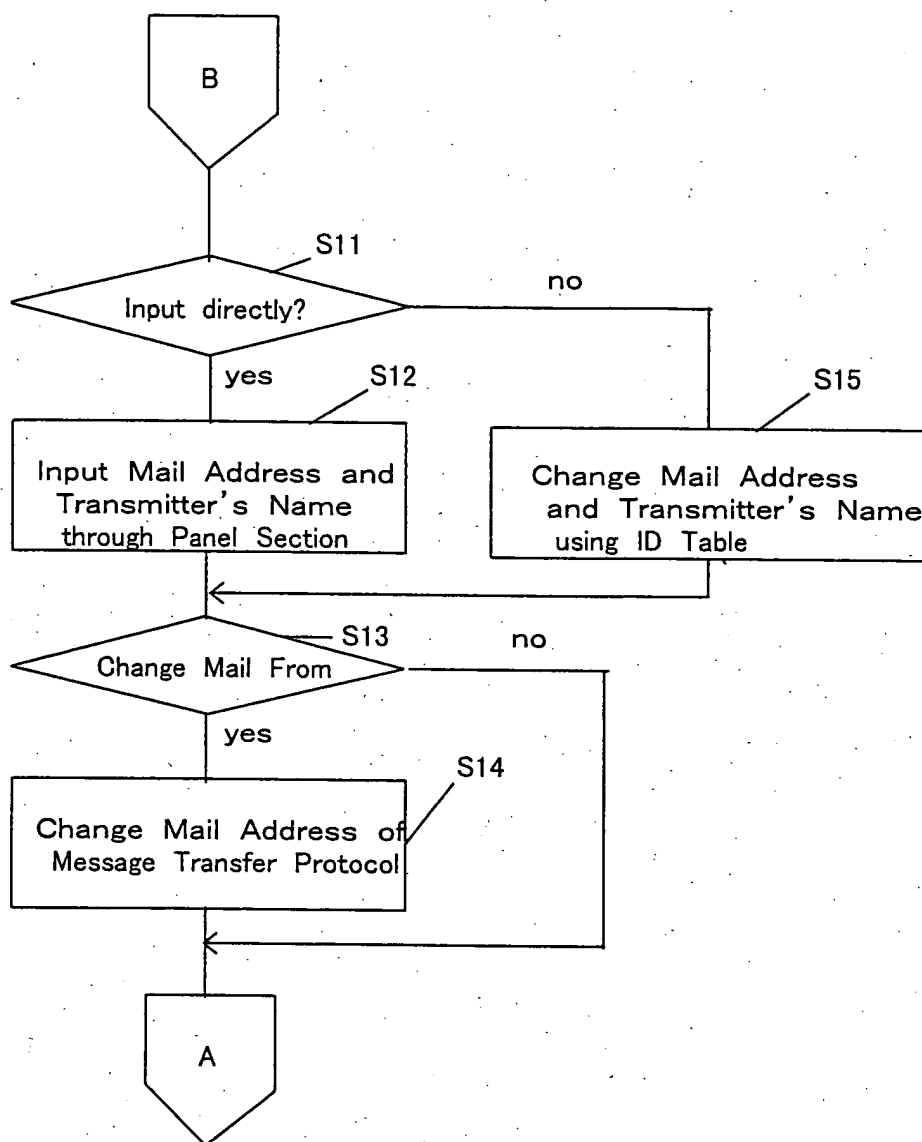


FIG. 5A

Mail From Command

MAIL<SP>FROM:<reverse-path>

Mail Message

Mime-Version: 1. 0

X-Mailer:Internet FAX, MGCS

From:"comment"<Mail address>

Subject: \* \* \* \*

To:aaa@bbb. ccc. ddd

Fig. 5B

Change Transmitter's Name of Mail Message  
into "suzuki"

Mail From Command

MAIL FROM:<fax@aaa. bbb. jp>

Mail Message

Mime-Version: 1. 0

X-Mailer:Internet FAX, MGCS

From:"suzuki", fax@aaa. bbb. jp>

Subject: \* \* \* \*

To:aaa@bbb. ccc. ddd

FIG. 5C

Change Transmitter's Name and Mail Address  
of Mail Message into "suzuki"

Mail From Command

MAIL FROM:<fax@aaa. bbb. jp>

Mail Message

Mime-Version: 1. 0

X-Mailer:Internet FAX, MGCS

From:"suzuki"<usr1@abc. defg. jp>

Subject: \* \* \* \*

To:aaa@bbb. ccc. ddd

FIG. 5D

Change Transmitter's Name, Mail Address and  
Mail From Command into "suzuki"

Mail From Command

Mail FROM: <usr1@abc. defg. jp>

Mail Message

Mime-Version: 1. 0

X-Mailer: Internet FAX, MGCS

From: "suzuki" <usr1@abc. defg. jp>

Subject: \* \* \* \*

To: aaa@bbb. ccc. ddd

FIG. 5E

Change Transmitter's Name, Mail Address and  
Mail From Command into "MGCS"

Mail From Command

MAIL FROM: <fax@aaa. bbb. jp>

Mail Message

Mime-Version: 1. 0

X-Mailer: Internet FAX, MGCS

From: "MGCS" <fax@aaa. bbb. jp>

Subject: \* \* \* \*

To: aaa@bbb. ccc. ddd

FIG. 5F

Change Transmitter's Name, Mail Address and  
Mail From Command into "usr4@abc. defg. jp"

Mail From Command

MAIL FROM: <usr4@abc. defg. jp>

Mail Message

Mime-Version: 1. 0

X-Mailer: Internet FAX, MGCS

From: <usr4@abc. defg. jp>

Subject: \* \* \* \*

To: aaa@bbb. ccc. ddd

FIG. 6

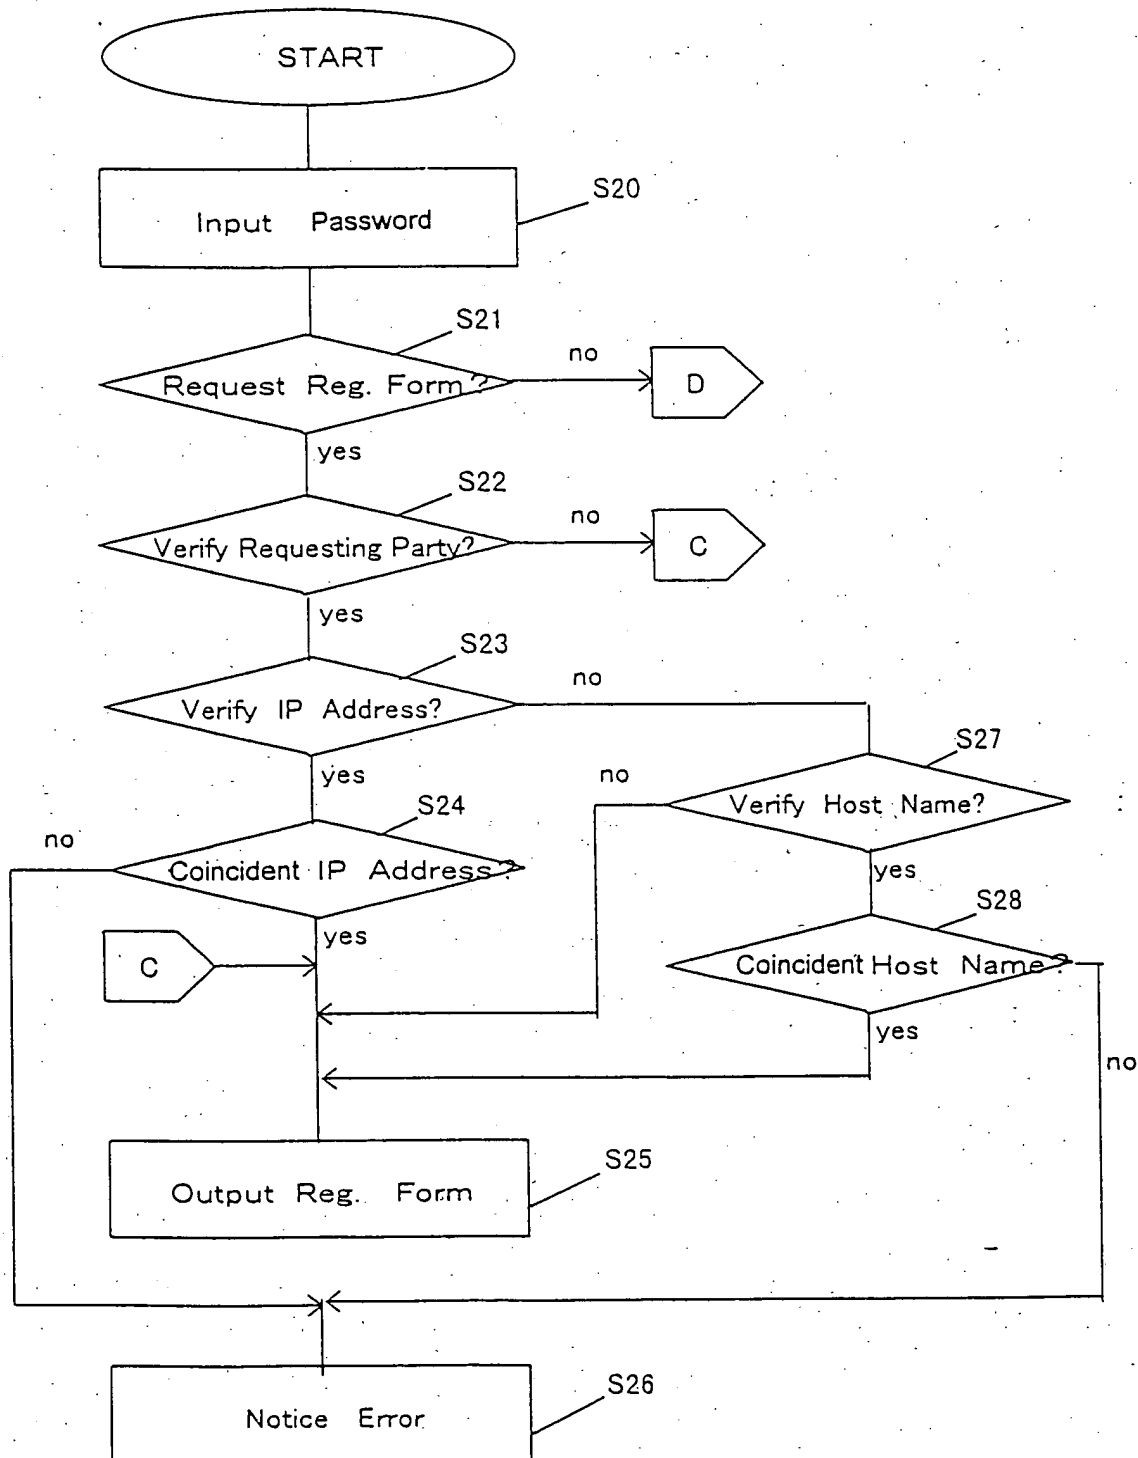




FIG. 7

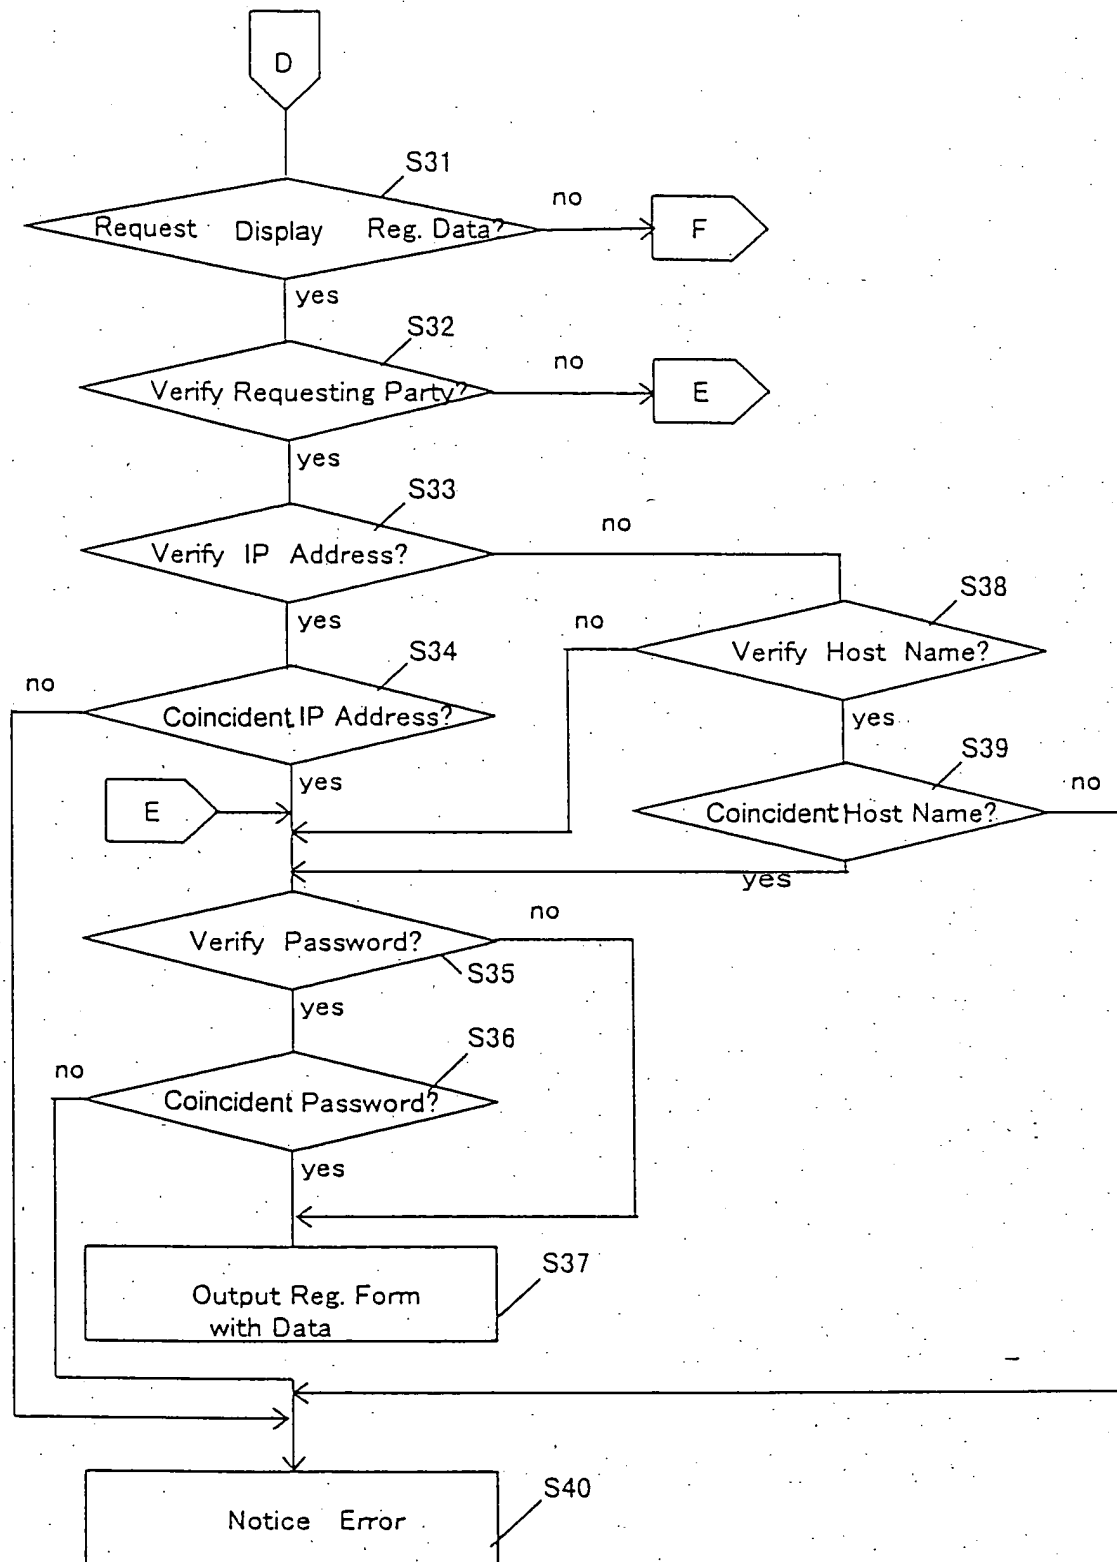


FIG. 8

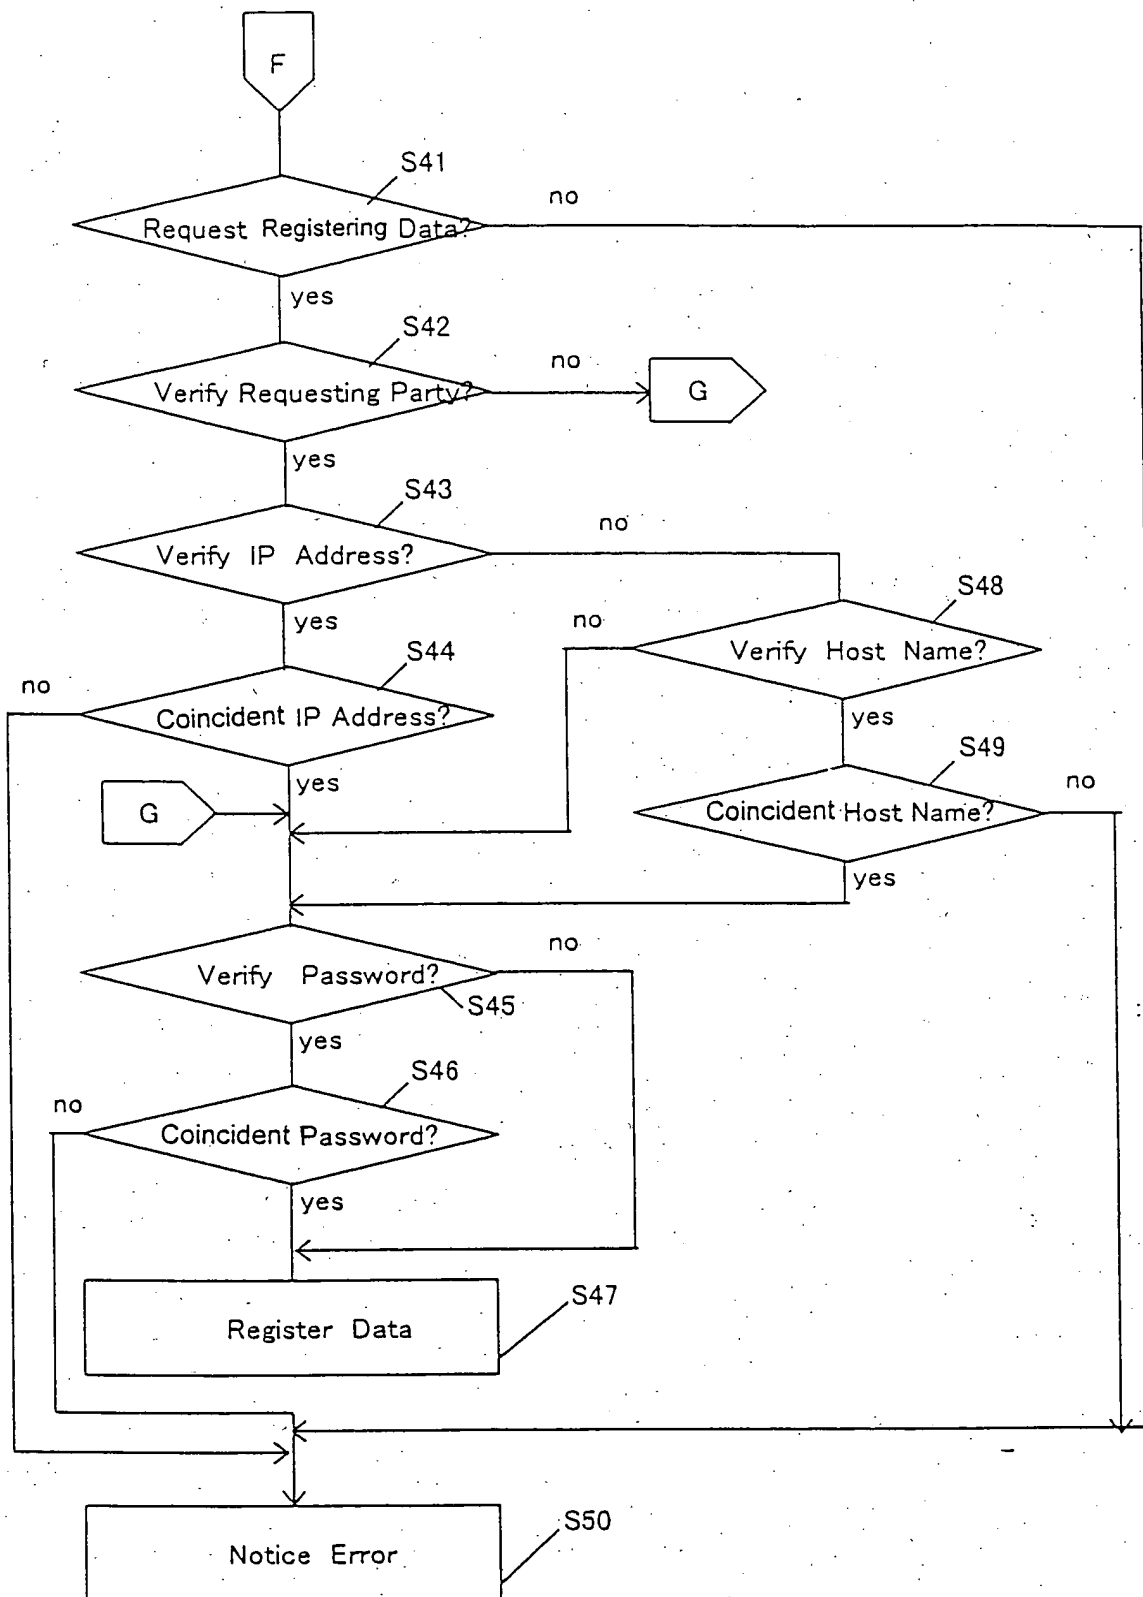


FIG. 9A

Transmitter's ID Table

IP Address	IP MASK
001.001.001.001	255.255.255.128
001.001.002.123	
001.002.003.111	

FIG. 9B

Host Name Table

Host Name
pc1.abc.defg.jp
pc2.abc.defg.jp
aaa.bbb.jp

FIG. 10

**REGISTRATION AND CONFIRMATION  
OF TRANSMITTER INFORMATION**

PASSWORD  f1

REGISTRATION ☐ f2 Registration of Data

READ OUT ☐ f3 Display Registered Data

	f4 Transmitter's Name	Mail Address f5	Error Mail f6
01	<input type="text"/>	<input type="text"/>	<input type="radio"/>
02	<input type="text"/>	<input type="text"/>	<input type="radio"/>
03	<input type="text"/>	<input type="text"/>	<input type="radio"/>
04	<input type="text"/>	<input type="text"/>	<input type="radio"/>
05	<input type="text"/>	<input type="text"/>	<input type="radio"/>
06	<input type="text"/>	<input type="text"/>	<input type="radio"/>
07	<input type="text"/>	<input type="text"/>	<input type="radio"/>
08	<input type="text"/>	<input type="text"/>	<input type="radio"/>
09	<input type="text"/>	<input type="text"/>	<input type="radio"/>
10	<input type="text"/>	<input type="text"/>	<input type="radio"/>

f7   f8

# FIG. 11

R: 220 BBN-UNIX. ARPA Simple Mail Transfer Service Ready  
 S: HELO USC-ISIF. ARPA  
 R: 250 BBN-UNIX. APPA  
  
 S: MAIL FROM: <Smith@USC-ISIF. ARPA>  
 R: 250 OK  
  
 S: RCPT TO: <Jones@BBN-UNIX. ARPA>  
 R: 250 OK  
  
 S: RCPT TO: <Green@BBN-UNIX. ARPA>  
 R: 550 No Such user here  
  
 S: RCPT TO: <Brown@BBN-UNIX. ARPA>  
 R: 250 OK  
  
 S: DATA  
 R: 354 Start mail input; end with <CRLF>. <CRLF>  
 S: Blah blah blah...  
 R: ...etc. etc. etc.  
 S:  
 R: 250 OK  
  
 S: QUIT  
 R: 221 BBN-UNIX. ARPA Service closing transmission channel

FIG. 12A      Verify IP Address without MASK  
                  from 001.001.002.123      Coincident      Receive  
                  from 001.001.002.124      Not Coincident      Reject

FIG. 12B      Verify IP Address with MASK  
                  from 001.001.001.103      Coincident      Receive  
                  from 001.001.001.201      Not Coincident      Reject

FIG. 12C      Verify Host Name  
                  from pc1.abc.defg.jp      Coincident      Receive  
                  from pc3.abc.defg.jp      Not Coincident      Reject

FIG. 12D      Verify Host Name  
                  from ws1.aaa.bbb.jp      Coincident      Receive  
                  from ws2.aab.bbb.jp      Not Coincident      Reject